

## MOTORS WITH POWER UP TO 850 W

T SERIES - Reversible

WATT: 740 / Consumption: 1100 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 12 mm

DATA SHEET  
THR



1. Cylindrical keyed shaft
2. Grip zone
3. Air inlets
4. Air exhaust

### Technical sheet

- Model	THR
- Code	8731201
Speed rpm - No-load	13000
Speed rpm - at Max Power	6700
Torque Nm - at Max Power	1
Torque Nm - Stall Torque	1,6

### CHARACTERISTICS OF SHAPE

The normal delivery condition:  
cylindrical shaft and body as shown in the photo.

Optional:



Shaft

- threaded - indication /AF (left rotation excluded - subject to checks for reversible)

- conical - indication /AC

- with collets - indication / AP

### PERFORMANCE FIGURES

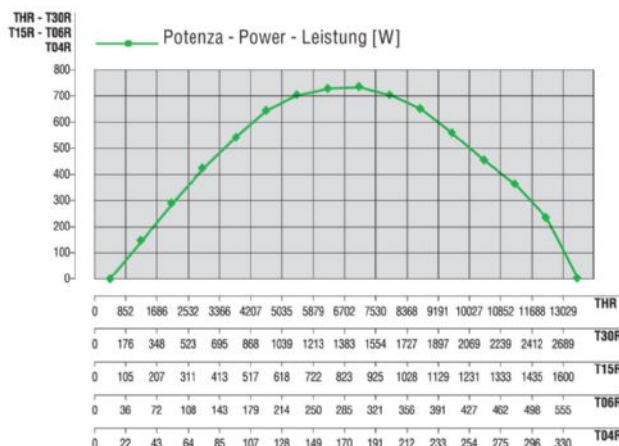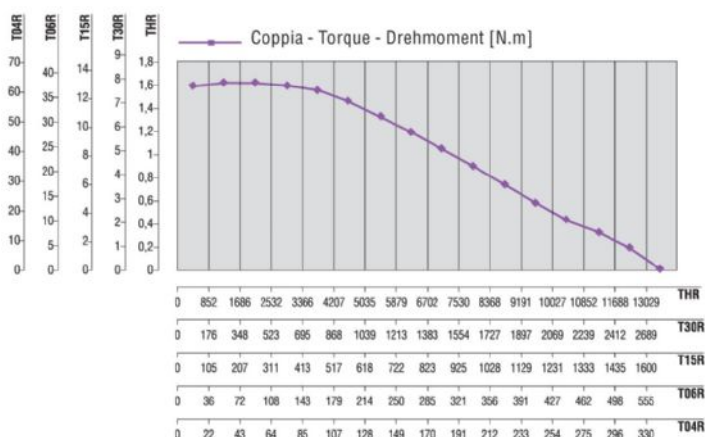

## MOTORS WITH POWER UP TO 850 W

T SERIES - Reversible

WATT: 740 / Consumption: 1100 NI/1'

Data measured at pressure of 6 bar - Minimum supply hose diameter: 12

mm





DATA SHEET  
THR

## RADIAL AND AXIAL LOADS


Model	Code	Fr (N)	Fa (N)	Co (N)
THR	8731201	1300	2350	4750

## OVERALL DIMENSIONS

Serie T Reversible  
Series T Reversible  
Serie T Umsteuerbar

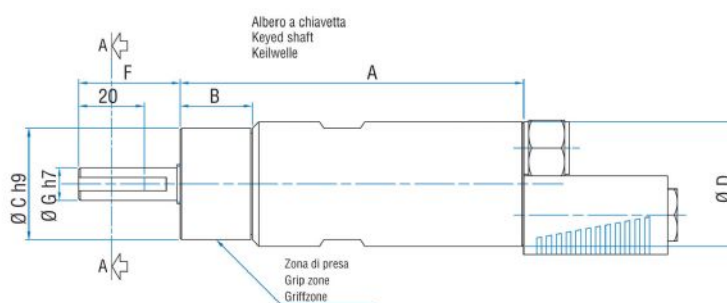

Flange disponibili per alcuni modelli.  
Flanges available for some models.  
Flansche erhältlich für einige Modelle.

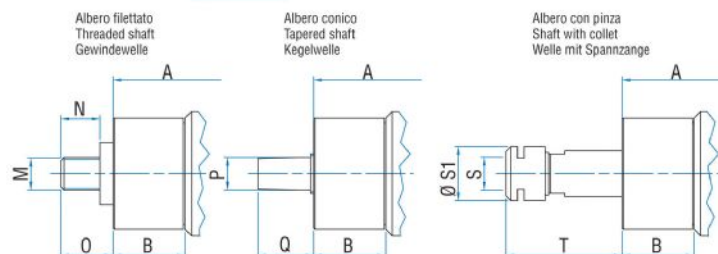

Model	Code	A	B	C	D	F	G	H	I	L	M	N	O	P	Q
THR	8731201	199,5	31,5	48	54	31,5	14	/	/	M6	1/2"x20UNF	15,5	21	B12	26,5